

Soccer & Rugby





Competition Soccer Goal Post Free Hanging System

Order No. 110120

Professional football goal type, Dimension 7.32 x 2.44 m. Compliant with the latest FIFA requirements. The goal post frames (100 x 120 mm), with a 2.5 mm wall thickness, are fitted with our integrated net suspension system. Goal corners (with corner strengthening on the insides). The goalposts are joined to the crossbar by means of a connecting plug and this guarantees enormous stability along with the option of dismantling the goal (for example for space-saving storage). The net hooks are integrated directly into the goal frame. This means that there are no external hooks, screwed or welded on, the net can be hung up or taken down easily and there is a significantly reduced danger of injury. Two net support poles are included. The goal post is white powder coated.

110130: Aluminium surface

Ground Socket Standard And Special

Order no. 110140

The standard ground socket is made from aluminium. It is installed in the ground to slot in the soccer goal post. The ground socket matches the soccer goal profile exactly. The socket measures a length of 400 mm.

Order no. 110150

The standard ground socket is made from aluminium. It is equipped with a special cover, which can be coated on site. It is installed in the ground to slot in the soccer goal post. The ground socket matches the soccer goal profile exactly. The socket measures a length of 400 mm.

Order no. 110160

Standard ground socket with lid, for net pole for **Order no. 110100, 110120, 110130**

Order no. 110170

Special ground socket with lid, for net pole, coat- able cover for **Order no. 110100, 110120, 110130**





Bar Frame

Order No. 110121

The bar frame is made from a special aluminium profile. Its cross section is 50x50x3 mm. The profile is equipped with a slot to fix the net hooks in the profile. The bar frame consists of three parts. The two side parts and the rear crossbar. The projection of the bar frame is 2.00 m. All screws to assemble the bar frame are made from stainless steel and are supplied together with the item.



Bar Frame With Attached Net Poles

Order No. 110122

The bar frame with net poles is made from a special aluminium profile. Its cross section is 50x50x3 mm. The profile is equipped with a slot to fix the net hooks in the profile. The bar frame consists of three parts. The two side parts and the rear crossbar. At the back of the side parts there are sleeves attached for the net poles. The projection of the bar frame is 2.00 m. All screws to assemble the bar frame are made from stainless steel and are supplied together with the item. The bar frame with net poles is made from a special aluminium profile. Its cross section is 50x50x3 mm. The profile is equipped with a slot to fix the net hooks in the profile. The bar frame consists of three parts. The two side parts and the rear crossbar. At the back of the side parts there are sleeves attached for the net poles. The projection of the bar frame is 2.00 m. All screws to assemble the bar frame are made from stainless steel and are supplied together with the item.



Training Goal Post Aluminium Surface

The practice soccer goal post is made of high-grade aluminium profiles. The inside dimension of this goal are 7.32x2.44 m. The front frame of the goal is made from oval 120x100x2.5 mm profile. The bottom frame is made from a rectangular hollow 80x60x3 mm. The top projection of the goal is 0.8 m. The lower projection measures 2.0 m. The item is available in a fully welded version and in a dismantle version for export. The goal is extremely robust and durable. It is equipped with the INTERLOCK net hook system, which ensures that the nets hangs perfectly.

Order No. 110040
Dismantle

Order No. 110030
Fully welded



Practice Soccer Goal Dismantle Version White Powder Coated

Order No. 110050

The practice soccer goal post is made of high-grade aluminium profiles. The inside dimension of this goal are 7.32x2.44 m. The front frame of the goal is made from oval 120x100x2.5 mm profile.

The bottom frame is made from a rectangular hollow 80x60x3 mm. The top projection of the goal is 0.8 m. The lower projection measures 2.0 m. The item is dismantled for export.

The goal is extremely robust and durable. It is equipped with the INTERLOCK net hook system, which ensures that the nets hang perfectly. The front frame of this goal post is powder coated in white colour.



Transport Wheel (Welded To The Post)

Order No. 110060

The transport wheels for goal posts are made from polyamide. The wheels measure a diameter of 200 mm. The support structure is realized by aluminium. The wheels are mounted with stainless steel screws. The item is directly welded to the goal post.



Transport Wheel For Goal Post

Order No. 110061

The transport wheels for goal posts are made from polyamide. The wheels measure a diameter of 200 mm. The support structure is realized by aluminium. The wheels are mounted with stainless steel screws. The item is directly can be fixed to the goal post on site.



Counterweights

Order No. 110070

The counterweights are made from aluminium. The weights are fixed on the back side of the bar frame. The weights provide sufficient weight to prevent the goal from toppling over in accordance with the EN standard. The wheels for the counterweights are made from polyamide. They measure a diameter of 200 mm. The wheels are used to move the goal around comfortably.

INFO

SECURING GOALS

Caution: danger of falling over! According to the regulations of local accident prevention federations and DIN/EN, movable goals must be secured against falling over. For example, with a junior goal with a 1.5 m base depth, a 125 kg counterweight is necessary to ensure a stability of 1100 N in accordance with DIN/EN.

For junior goals with ground frames of rectangular profiles

100 kg – for a depth of 2 m:

125 kg – for a depth of 1.5 m

110067: 100 Kg counter weight. For mobile goal post 7.32 x 2.44 m, Projection 2.00 m.

110068: 170 Kg counter weights. For mobile goal post 7.32 x 2.44 m, Projection 1.50 m

110069/1.5: 125 Kg counter weights. For junior goal post 5.00 x 2.00 m. Projection 1.50 m

110069/2.0: 100 Kg counter weights. For junior goal post 5.00 x 2.00 m. Projection 2.00 m



Ground Anchors

Order No. 111210

The ground anchor is made from aluminium. The aluminium is equipped with a thread for an M 16 screw. The ground anchor is used to fix mobile goal posts to the floor. One set consists of 4 aluminium anchors and 4 stainless steel screws.



Junior Football Goals (5 X 2 M)

Junior football goals (5 x 2 m) made of high-grade aluminium profiles, welded in one piece. Our junior football goal is manufactured from high-grade aluminium profiles. Oval goal frame profile (100 x 120 x 2.5 mm), Rectangular ground frame profile (80 x 60 x 3 mm). The goal is extremely robust and durable. The aluminium construction also guarantees that they are easy to handle and have the typical aluminium stability.

110210: Projection 1.00 m

110220: Projection 1.50 m

110230: Projection 2.00 m

112071: Frame 3.66 x 1.80 m Projection 0.80/1.50 m welded on one piece

112072: Frame 3.66 x 1.80 m Projection 0.80/1.50 m (Dismantle Version)

110251: Projection 1.50 m (Dismantle Version, Frame white powder coated

110240: Projection 1.00 m (Dismantle Version)

110250: Projection 1.50 m (Dismantle Version)

110260: Projection 2.00 m (Dismantle Version)





Futsal Goal Post

The futsal goal is made from special aluminium profiles. The profiles for the front frame are square hollow with a cross section of 80x80x2.5 mm. The profile is equipped with an integrated net suspension system. The bar frame is made from a 50x50x3 mm square hollow with integrated net suspension as well. The goal measures 3.00 m in width and 2.00 m in height. The projection is 0.80 m at the top and 1.00 m at the bottom. The goal is available fully welded or dismantle for export.

Order No.	Type	Colour
110390	Fully Welded	Aluminium
110391	Dismantle	Aluminium
110410	Fully Welded	White
110420	Dismantle	White



Futsal Goal Post Foldable

The futsal goal foldable is made from special aluminium profiles. The profiles for the front frame are square hollow with a cross section of 80x80x2.5 mm. The profile is equipped with an integrated net suspension system. The bar frame is made from a 50x50x3 mm square hollow with integrated net suspension as well. The goal measures 3.00 m in width and 2.00 m in height. The projection is 0.80 m at the top and 1.00 m at the bottom. The projection can be folded inwards and upwards to minimize the storage space for this goal post. The goal is available fully welded or dismantle for export.

Order No	Type	Colour
110370	Fully Welded	Aluminium
110371	Dismantle	Aluminium
110380	Fully Welded	White
110381	Dismantle	White





Hobby Soccer Goal Post

The hobby soccer goal is made from special aluminium profiles. The profiles for the front frame are square hollow with a cross section of 120x100x2.5 mm. The profile is equipped with an integrated net suspension system. The bar frame is made from a 50x50x3 mm square hollow with integrated net suspension as well. The goal measures 3.00 m in width and 2.00 m in height. The projection is 0.80 m at the top and 1.00 m at the bottom. The goal is available fully welded or dismantle for export.

Order No.	Type	Colour
110430	Fully Welded	Aluminium
110430/DS	Dismantle	Aluminium
110430/DS/FD	Foldable	Aluminium
110430/W	Fully Welded	White
110430/W/DS	Dismantle	White
110430/W/DS/FD	Foldable	White



Mini Goal Post Fully Welded

The mini soccer goal post is made from special aluminium profiles. The profiles for the front frame are square hollow with a cross section of 80x80x2.5 mm. The profile is equipped with an integrated net suspension system. The bar frame is made from a 40x40x3 mm square hollow. The projection of the mini soccer goal post is 0.5 m at the top and at the bottom. The goal is available fully welded or dismantle for export.

Front frames also available in oval profile 100 x 120 mm.

Order No.

- 111240:** Football goal, 120 x 80 cm, fully-welded
- 111250:** Football goal, 120 x 80 cm, foldable
- 111270:** Football goal, 180 x 120 cm, fully-welded
- 111280:** Football goal, 180 x 120 cm, foldable
- 111300:** Football goal, 150 x 100 cm, fully-welded
- 111310:** Football goal, 240 x 160 cm, fully-welded
- 111320:** Net for Football Goal, 120 x 80 cm. PP 4 mm, Green Colour
- 111330:** Net for Football Goal, 180 x 120 cm, PP 4 mm, Green Colour
- 111331:** Net for Football Goal, 150 x 100 cm, PP 4 mm, Green Colour
- 111340:** Net for Football Goal, 240 x 160 cm, PP 4 mm, Green Colour



Mini Goal Post Foldable version

The mini soccer goal post is made from special aluminium profiles. The profiles for the front frame are square hollow with a cross section of 80x80x2.5 mm. The profile is equipped with an integrated net suspension system. The bar frame is made from a 40x40x3 mm square hollow. The projection of the mini soccer goal post is 0.5 m at the top and at the bottom. The net supporters at the side and the bar frame can be folded. This folding allows to minimize the storage space of this post. The goal is available fully welded or dismantle for export.

Front frames also available in oval profile 100 x 120 mm.

Order No.

- 111250** 120 x 80 cm. Foldable system
- 111260** 150 x 100 cm. Foldable system
- 111280** 180 x 120 cm. Foldable system
- 111291** 240 x 160 cm. Foldable system





Hobby Soccer Goal Post (3x2m) "Close Back"

Order No. 111170

Hobby Soccer Goal Post (3x2m) "Close Back"

Fully welded recreational goal made of high-grade aluminium profiles.

Due to its robust construction, the goal is almost completely vandalism-proof and as a result well suited for use on public playing fields or in playgrounds. The goal frame is made from our oval profiles (120 x 100mm) with a wall thickness of 2.5mm. The rear wall of our recreational goal consists of fully inserted round tubes with a diameter of 38mm and a wall thickness of 3.0mm.

Strut spacing 89mm compliant with latest DIN 1176/. Supplied with 4 ground anchors.




Hobby Soccer Goal Post with Basketball Stand

Order No. 111180

Hobby Soccer Goal Post (3 x 2 m). "Closed Back"

with Basketball Stand. Fully welded recreational goal made of high-grade aluminium profiles. Due to its robust construction, the goal is almost completely vandalism-proof and as a result well suited for use on public playing fields or in playgrounds. The goal frame is made from our oval profiles (120 x 100 mm) with a wall thickness of 2.5 mm. The rear wall of our recreational goal consists of fully inserted round tubes with a diameter of 38 mm and a wall thickness of 3.0 mm. Supplied with 4 ground anchors.

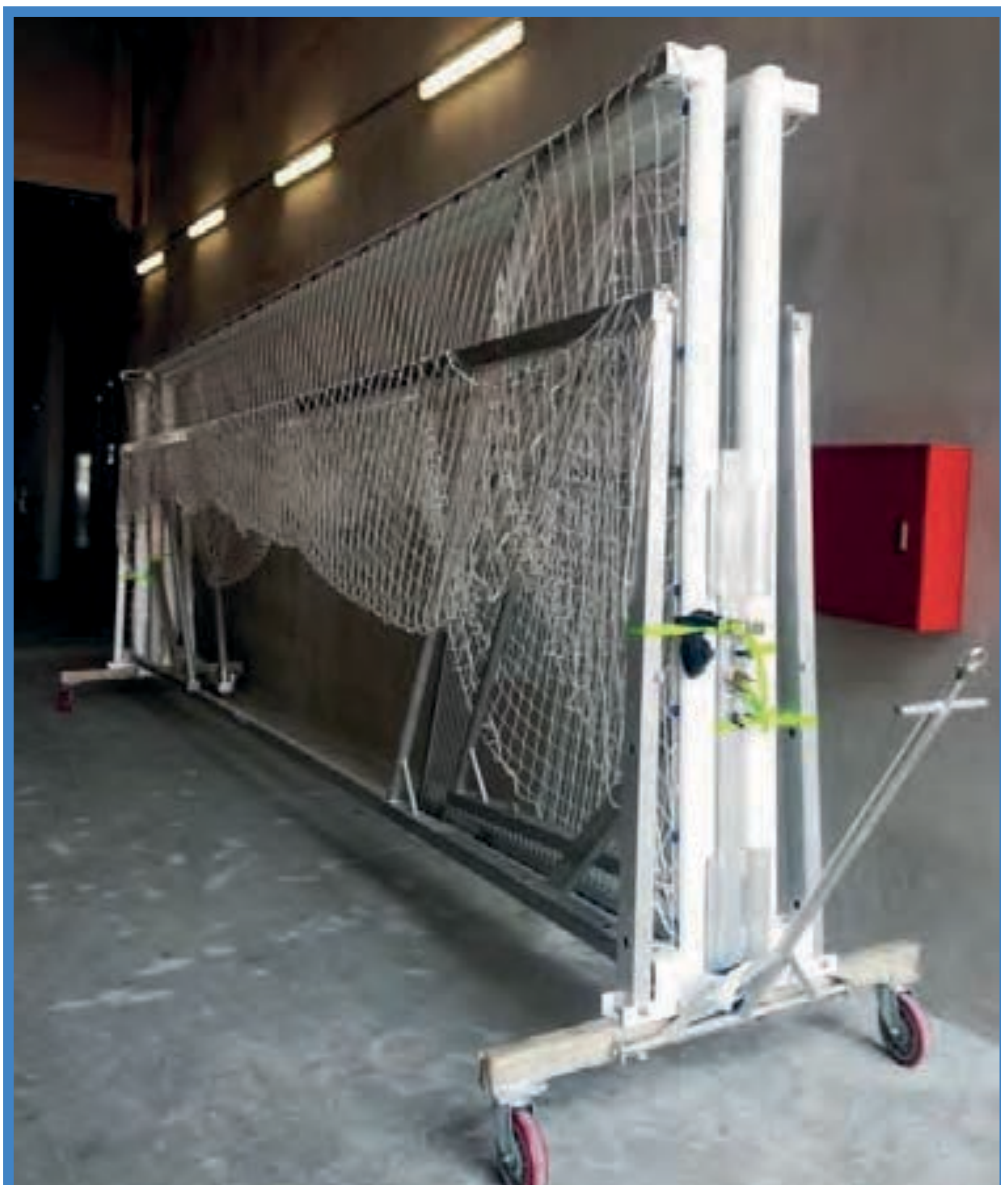

Transport Cart for Soccer Goal Post

Order No. 110125

Transport carts for soccer goal post are made of high-grade aluminium profiles. The aluminium construction guarantees a high loading capacity along with simple and problem-free use. The goal post can easily and safely be stored with our transport cart.

110125: Transport Trolley for Competition Soccer Goal Post

110126: Transport Trolley for Training Goal Post Foldable



Beach Soccer Post

114000: Portable Beach Soccer Goal (5.5 m)

The portable beach soccer goal post is made of high-grade aluminium profiles.

The inside dimension of this goal are 5.5x2.2 m.

The front frame of the goal is made from oval 120x100x2.5 mm profile.

The bottom frame is made from a rectangular hollow 80x60x3 mm.

The top projection of the goal is 0.8 m.

The lower projection can be chosen between three options (1.0 m, 1.5 m, and 2.0 m).

The goal is completely powder coated in yellow colour. The item is available in a fully welded version and in a dismantle version for export. The goal is extremely robust and durable.

It is equipped with the INTERLOCK net hook system, which ensures that the nets hangs perfectly.

113292: Frame dimension 3.00 x 2.00 m



Beach Soccer Goal Free Hanging Net

Order No. 114015

Beach Soccer Goal free hanging net. Portable (5.5 m) The portable beach soccer goal post is made of high-grade aluminium profiles. The inside dimension of this goal are 5.5x2.2 m. The front frame of the goal is made from oval 120x100x2.5 mm profile. The bottom frame is made from a rectangular hollow 80x60x3 mm. The top projection of the goal is 0.8 m. The lower projection can be chosen between three options (1.0 m, 1.5 m, and 2.0 m). Our goal post is completely powder coated in yellow colour. The item is available in a fully welded version and in a dismantle version for export. The goal is extremely robust and durable. It is equipped with the INTERLOCK net hook system, which ensures that the nets hang perfectly.

Order No. 114015

Beach Soccer Net 5.5 x 2.2 m. Made from polypropylene 4 mm Mesh 100 mm.

Order No. 114016

Beach Soccer Net 3.0 x 2.0 m. Made from polypropylene 4 mm Mesh 100 mm.



Beach Soccer Goal Fixed Type

Beach Soccer Goal Fixed Type, free hanging net.

Beach soccer goal post fixed version included sockets. Made from special aluminium profiles. Oval goal post frames, 120 x 100 x 2, 5 mm. Included integrated safety net hook system. Yellow powder coated.

Order No. 114010

Beach goal post frame: 5.00 x 2.00 m ground socket system, (free hanging net), (Without ground socket

Order No. 113391

Beach goal post frame: 3.00 x 2.00 m ground socket system, (free hanging net), Without ground socket

Order No. 110254

Socket with adapter for beach goal post system fixed type (Set of 2 piece)

Order No. 114015

Beach Soccer Net 5.5 x 2.2 m. Made from polypropylene 4 mm Mesh 100 mm.

Order No. 114016

Beach Soccer Net 3.0 x 2.0 m. Made from polypropylene 4 mm Mesh 100 mm.

Beach Soccer net. Dimension 5.50 x 2.20 m. Top depth 0.80 m, and bottom depth 1.50m. Knotless high tenacity Polypropylene, Thickness 4 mm, Mesh 4 mm. Available in different colours.

Order No. 114040

Beach soccer accessories: tape used for marking the playing field. Set of 2 tapes, length 37 m and width 80 mm, with eyelets on the tips.





Futsal Net

The Futsal goal net is made from knotless high tenacity PP. It measures 3 m width and 2 m in height. The projection is 80 cm on top and 100 cm at the bottom. The mesh width is 100 mm. The net stands out because of its high mesh rigidity and high energy absorption. It can be fixed easily due to its light weight and flexibility. At the same time the net is also very abrasion resistant. The net fulfils the requirements of DIN EN 749. The net is available in assorted colours and thicknesses.

Order No. 110450

Green colour 4 mm

Order No. 110460

White colour 4 mm



Junior Goal Net

The junior goal net is made from knotless high tenacity PP. It measures 5 m width and 2 m in height. The projection is 80 cm on top and 100/150/200 cm at the bottom. The mesh width is 100 mm. It has a thickness of 4 mm. The net stands out because of its high mesh rigidity and high energy absorption. It can be fixed easily due to its light weight and flexibility. At the same time the net is also very abrasion resistant. The net fulfils the requirements of DIN EN 749. The net is available in assorted colours.

Order No.	Projection	Colour
110910	0.8/1.0	Green
110940	0.8/1.0	White
111000	0.8/1.5	White
111010	0.8/1.5	Green
111010	0.8/2.0	White
111020	0.8/2.0	Green

Maximum resistance and reliability

This new line of knotless nets made of high tenacity polypropylene represents a new concept of a net and it has been possible thanks to the use of the latest technologies.

All gold line nets have been produced according to technical specifications specified in every European Norm regarding sport nets.

- Recyclable 100%
- Specific weight 0.91, lighter than water
- 100% inert (does not produce bacteria).
- Anti-allergic 100%
- Not eatable by any insects (moths, for example)
- Does not accumulate static electricity
- High resistance to abrasion
- High protection against ultraviolet rays (lost of energy inferior to the polyamid nets)
- keeps the tenacity in acid and alkaline environments
- Low absorption of water (0.05%, it is one of the lowest factors in all the fibres)
- Good thermic insulator
- It does not affect any acid except xilen at the boiling point
- Being a non absorbent fibre it is resistant to grime and offers the highest protection for stains
- Easy assembly
- It is not necessary to stabilize it dimensionally through thermo-fixing of the knots. It does not have knots (new technology). There is no possibility of knots moving.
- They come in different colours (green, blue,red,etc.)

Soccer Goal Net for Training Post (Nylon)

Order No. 111051

Dimension 7.50 x 2.50 m, Top depth 0.80 m, and bottom depth 2.00 m Knot-less high tenacity Nylon, Thickness 4 mm, Mesh 100 mm White colour.

Soccer Goal Net for Training Goal Post

Order No. 111070

Dimension 7.50 x 2.50 m, Top depth 0.80 m, and bottom depth 2.00 m Knot-less high tenacity Polypropylene, Thickness 4 mm, Mesh 4 mm White colour.



Competition Soccer Nets

The competition soccer goal net is made from knotless high tenacity PP. It measures 7.32 m width and 2.44 m in height. The projection is 80 cm on top and 100/150/200 cm at the bottom. The mesh width is 100 mm. It has a thickness of 4 mm. The net stands out because of its high mesh rigidity and high energy absorption. It can be fixed easily due to its light weight and flexibility. At the same time the net is also very abrasion resistant. The net fulfils the requirements of DIN EN 749. The net is available in assorted colours.

Order No.	Projection	Colour
111090	2.0/2.0	Green
111100	2.0/2.0	White



Soccer Goal Net Hexagonal

The competition soccer goal net hexagonal is made from knotless high tenacity PP. It measures 7.32 m width and 2.44 m in height. The projection is 80 cm on top and 100/150/200 cm at the bottom. The mesh width is 120 mm. It has a thickness of 4 mm. The net stands out because of its high mesh rigidity and high energy absorption. It can be fixed easily due to its light weight and flexibility. At the same time the net is also very abrasion resistant. The net fulfils the requirements of DIN EN 749. The net is available in assorted colours.






Order No.	Projection	Colour
111110	2.0/2.0	White
111120	2.0/2.0	Green
111121	2.0/2.0	White/green
111122	2.0/2.0	White/blue
111123	2.0/2.0	White/red
111124	2.0/2.0	Blue/red



Two Colour Soccer Goal Net

Two-Colour Football Goal Nets. High tenacity Polypropylene. Thickness 4 mm, mesh 100 mm Made in Europe

Order No	Colour	Size	Projection
119515	Green/white	7.5/2.5	0.8/2.0
119520	Green/white	7.5/2.5	2.0/2.0
119525	Red/white	7.5/2.5	0.8/2.0
119530	Red/white	7.5/2.5	2.0/2.0
119535	Blue/white	7.5/2.5	0.8/2.0
119540	Blue/white	7.5/2.5	2.0/2.0
119545	Green/white	5.15/2.05	0.8/1.0
119550	Green/white	5.15/2.05	0.8/1.5
119565	Red/white	5.15/2.05	0.8/1.0
119570	Red/white	5.15/2.05	0.8/1.5
119575	Blue/white	5.15/2.05	0.8/1.0
119580	Blue/white	5.15/2.05	0.8/1.5
119585	Green/white	3.0/2.0	0.8/1.0
119600	Red/white	3.0/2.0	0.8/1.0
119605	Blue/white	3.0/2.0	0.8/1.0






Soccer Goal Net “Dralo”

Order No. 119850

Practice Soccer goal nets made of galvanized steel wire ropes. Net size: 3 m wide, 2 m high, 0.90 m deep at the top and 1.10 m deep at the bottom. Mesh size: approx. 12 cm, square mesh.

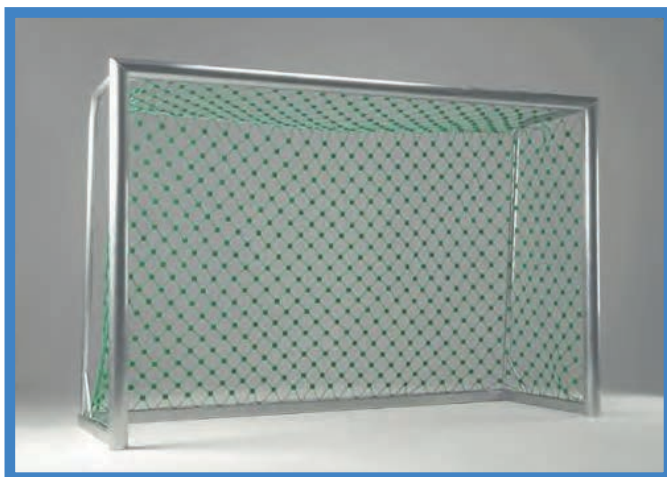

Soccer goal net “Hercules”

Order No. 119860

Soccer goal net, vandal proof, made of Hercules rope 5 mm dia. To suit Soccer goals. Without goal.

Dimensions: width 3.00 m, height 2.00 m, top depth 0.90 m, bottom depth 1.10 m. Mesh size: 11 cm, diagonal mesh formation.



Futsal Backstop System

Order No. 119320

Distance post to post approx. 5 m. Backstop post made from special aluminium oval profile 100 x 120 x 2.5 mm. Projection 50 cm. Included ground sockets standard and spacer on the ground for fixing the net. The net is made from Polypropylene thickness 4 mm Mesh 100 mm and green colour. Included pull up devices for the net. This backstop system is available in different heights.






119300: Weight 200 gram per meter attached to the net



Backstop Post For Soccer Height 4, 5, 6, 7, 8 M

The backstop is made from special aluminium profiles. The backstop posts are fitted in ground sockets. The cross section of the post measures 120x100x2.5 mm. The ground sockets measure a length of 800 mm. The net is made from high tenacity knotless PP. The mesh width is 100 mm. It is green in colour. The net is fixed onto stainless steel wires. The stainless steel wires can be fixed with the also supplied turnbuckles. Usually the backstop measures a length of 25 m. Other lengths are available on request.





Backstop Net

The backstop net is made from knotless high tenacity polypropylene. The nets are 100 per cent recyclable. Their specific weight is lighter than water. It does not produce bacteria and is anti-allergic. It does not edible for insects. It also doesn't accumulate static electricity. It keeps the tenacity in acid and alkaline environments. It hardly absorbs any water and is a good thermic insulator. The knots are thermos fixed. Therefore, it is not possible to move the knots. It has a high resistance to abrasion.

The net is available in assorted colours in various thicknesses and mesh widths:

Order No.	Colour	Mesh Width	Thickness
119190	Green	45 mm	2.3 mm
119100	Green	45 mm	3.0 mm
119080	White	45 mm	3.0 mm
119215	Green	100 mm	3.0 mm
119230	Green	120 mm	3.0 mm
119140	Green	45 mm	4.0 mm
119275	Green	100 mm	4.0 mm
119285	Green	120 mm	4.0 mm
119270	White	100 mm	4.0 mm
119280	Black	100 mm	4.0 mm

Maximum resistance and reliability

This new line of knotless nets made of high tenacity polypropylene represents a new concept of a net and it has been possible thanks to the use of the latest technologies.

All gold line nets have been produced according to technical specifications specified in every European Norm regarding sport nets.

- Recyclable 100%
- Specific weight 0.91, lighter than water
- 100% inert (does not produce bacteria).
- Anti-allergic 100%
- Not eatable by any insects (moths, for example)
- Does not accumulate static electricity
- High resistance to abrasion
- High protection against ultraviolet rays (lost of energy inferior to the polyamid nets)
- keeps the tenacity in acid and alkaline environments
- Low absorption of water (0.05%, it is one of the lowest factors in all the fibres)
- Good thermic insulator
- It does not affect any acid except xilen at the boiling point
- Being a non absorbent fibre it is resistant to grime and offers the highest protection for stains
- Easy assembly
- It is not necessary to stabilize it dimensionally through thermo-fixing of the knots. It does not have knots (new technology). There is no possibility of knots moving.
- They come in different colours (green, blue, red, etc.)



AFN Multi Court

Order No. 111200

AFN MULTI COURT. The boards for our AFN MULTI COURT are made of aluminium side profiles (double-walled, wall thickness 2.3 mm) bordered in a U-profile with a radius of 2 mm and completely welded. The boards are 1 metre high. Rubber mats are placed under each fastening position to reduce the noise levels. For the freestanding version, counterweights (each weight approx. 20 kg) are placed on the base frames of the posts. Sockets or weights are included. The net is hung up via Nylon rings which are fitted onto the outsides of the boards through which a rope can be threaded. The entrance door (in the standard version: width 1 m, height 3 m) is a part of one board and is opened outwards. Fully welded doors, 3 x 2 m, made from high-grade aluminium.

Our AFN integrated net hooks are used for the net suspension. In the standard version, the nets are made of polypropylene (PP), 4 mm thick, with a mesh size of 100 x 100 mm. The net is fixed on via rings welded on to the boards and on the upper parts of the upright posts. The net encloses the court completely up to a total height of 3 metres.

On request soccer court can be extended with further board elements, but also with mini-goals, basketball rings or volleyball equipment.

The complete construction is made from aluminium.

115005 Multiplaycourt, Dimension on request

115000 Multiplaycourt, Dimension 30 x 10 m.

115010 Multiplaycourt, Dimension 20 x 10 m.

115020 Multiplaycourt, Dimension 18 x 10 m.

115030 Multiplaycourt, Dimension 15 x 10 m.

Bear in mind when comparing products.

- Completely from aluminium.
- Low noise level.
- Flexibly extendible.

Other dimensions on request.





Player & Coaches Cabin Curved Roof

The player cabin curved roof is made from high grade aluminium profiles. The structure is made from square hollow profiles with a cross section of 40x40x3 mm. The lower section is line by special aluminium profiles. The back side of the player cabin is closed with polycarbonate sheets. The sheets are mounted in a special support profile, which have a groove to mount them. All seating profiles are powder coated. The cabin measures a height of 2.2 m with a roof overhang of 20 cm. The bottom depth of the cabin is 90 cm. The player cabin is manufactured in one piece. For export, the cabin is also available in a dismantled version. On request, the whole cabin can be powder coated. The cabin is available in various lengths.

Further features:

- Curved roof.
- Synthetic glass (Acryl) all around.
- Back rests made of anodized aluminium profile.

Height: 225 cm. Roof overhang: 20 cm. Ground depth: 100 cm

117010: Length 2.00 m

117000: Length 3.00 m

117020: Length 4.00 m

117040: Length 5.00 m

117050: Length 6.00 m

117060: Length 7.00 m

117061: Length 8.00 m

Other dimensions request.

Player & Coaches Cabin Curved Roof Model CLASSIC with Wheels

Order No. 116990:

The wheels for player cabins are directly welded to the side/back part of the player cabin. The wheels measure a diameter of 200 mm. For player cabins below 5 m one set consists of 4 wheels. For player cabins with a length of 5 m or above another wheel is added at the back.



Player Cabin Model “ECO 1”

The player cabin ECO 1 is made from high grade aluminium profiles. The structure is made from square hollow profiles with a cross section of 40x40x3 mm. The back side of the player cabin is closed with polycarbonate sheets. The sheets are mounted in a special support profile, which have a groove to mount them. All seating profiles are powder coated. The cabin measures a height of 2.2 m with a roof overhang of 15 cm. The bottom depth of the cabin is 83 cm. The player cabin is manufactured in one piece. For export, the cabin is also available in a dismantled version. On request, the whole cabin can be powder coated. The cabin is available in various lengths.

Dimensions

Height: 2m / 206 cm
Roof overhang: 15 cm
Ground depth: 83 cm

117570: Length 2.00 m
117575: Length 3.00 m
117580: Length 4.00 m
117585: Length 5.00 m
117590: Length 6.00 m
117595: Length 7.00m

Other dimension on request.



Player Cabin Model “ECO”

The player cabin ECO is made from high grade aluminium profiles. The structure is made from square hollow profiles with a cross section of 40x40x3 mm. The lower section is line by special aluminium profiles. The back side of the player cabin is closed with polycarbonate sheets. The sheets are mounted in a special support profile, which have a groove to mount them. It is equipped with plastic seats. The cabin measures a height of 2.2 m with a roof overhang of 20 cm. The bottom depth of the cabin is 90 cm. The player cabin is manufactured in one piece. For export, the cabin is also available in a dismantled version. On request, the whole cabin can be powder coated. The cabin is available in various lengths.

Standard size:
Height: 225 cm
Roof overhang: 20 cm
Ground depth: 1.00 m

117500: Length 2.00 m
117510: Length 3.00 m
117520: Length 4.00 m
117530: Length 5.00 m
117540: Length 6.00 m
117560: Length 7.00m

Other dimension on request.





Reserve Player Bench Model "Champ"

The player cabin Champ is made from high grade aluminium profiles. The structure is made from square hollow profiles with a cross section of 40x40x3 mm. The lower section is line by special aluminium profiles. The back side of the player cabin is closed with polycarbonate sheets. The sheets are mounted in a special support profile, which have a groove to mount them. It is equipped with specially manufactured leather seats. The cabin measures a height of 2.2 m with a roof overhang of 20 cm. The bottom depth of the cabin is 150 cm. The player cabin is manufactured in one piece. For export, the cabin is also available in a dismantled version. On request, the whole cabin can be powder coated. The cabin is available in various lengths.

Standard size:

Height: 200 cm

Roof overhang: 5 cm

Ground depth: 200 cm

Cabins with fittings for ground anchors as a standard.

117405: Reserve Player Bench Model "Champ" 23 Seat

117406: Reserve Player Bench Model "Champ" 12 Seat

117410: Reserve Player Bench Model "Champ" 10 Seat

117411: Reserve Player Bench Model "Champ" 8 Seat

117412: Reserve Player Bench Model "Champ" 6 Seat


117413: Reserve Player Bench Model "Champ" 4 Seat

117414: Reserve Player Bench Model "Champ" 3 Seat

117415: Reserve Player Bench Model "Champ" 2 Seat

117416: Reserve Player Bench Model "Champ" 1 Seat

117417: Reserve Player Bench Model "Champ" length on request

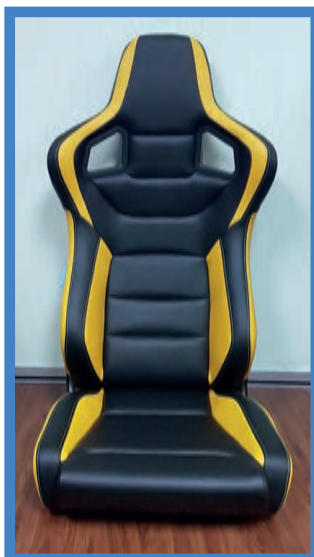



Player Cabins Model "SG"

Player and Coaches Cabins Model "SG". Team and coach cabins made from high-grade aluminium profiles and welded in a one-piece construction. The robust construction and easy handling of our high quality Player and coach cabins, make them most impressive, the whole rear side of this cabin is made from plastic sheets. Lower section lined with aluminium. Further features. Curved roof. Synthetic glass (Acryl) all around. Included plastic seats high back rests. Seat height 30 cm, Available in different colours.

Standard size: Height: 225 cm

Roof overhang: 60 cm

Ground depth: 1.50 cm

117200: Length 2.00 m

114190: Length 3.00 m


114210: Length 4.00 m


114220: Length 5.00 m

114230: Length 6.00 m

114240: Length 7.00 m

Other length on request.

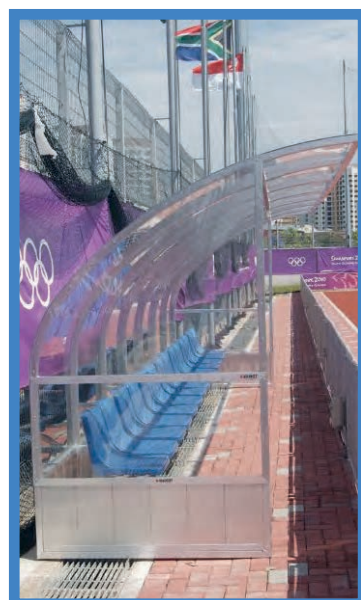

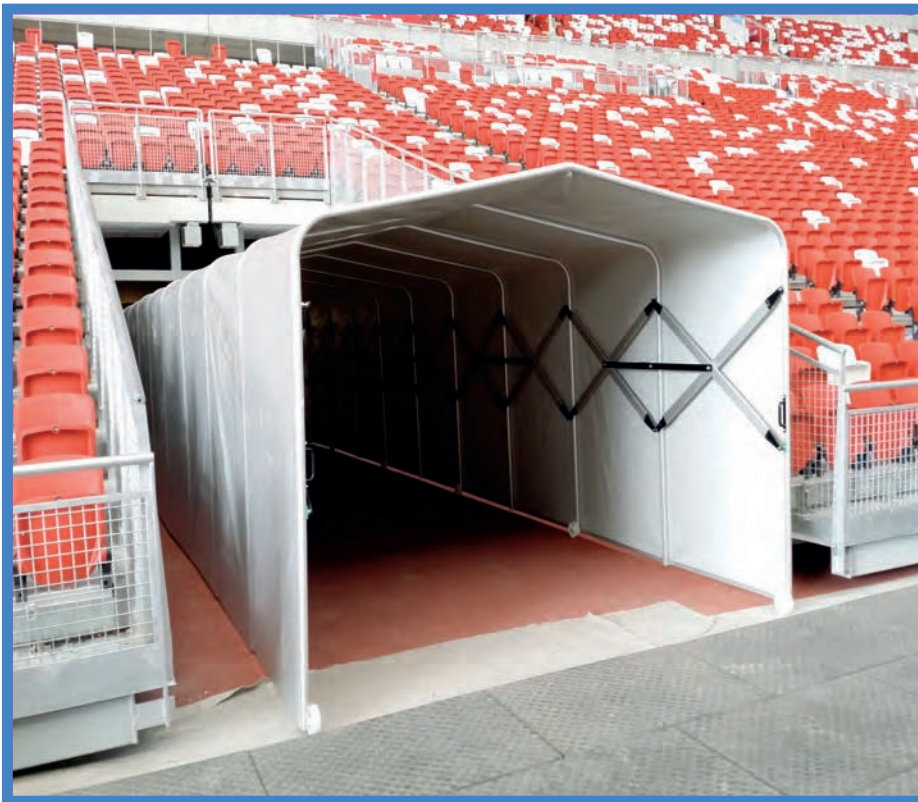**Order No. 113020**

Width 3.00 m Height 2.30 m

Made with structure of aluminium anodized. Profile of 43 x 35 mm. For the arches, which it allows to be able to replace the cloths of canvas between arch and arch of an independent way on the part of the own client, avoiding to have to send the tunnel to factory in case of break of someone of the same ones. Set of spikes of assembly in stainless steel AISI 304.

Movement of opening and closing by means of scissors of aluminium of 50 x 13.5 mm.; The heads of draft are of alloy of aluminium of smelting.

4 tension points extra to fix and to stretch the canvas (only one on the market)

Skates of slide of the scissors in POLIZENE 500 that allow minimizing the rubbing in 60 %, which minimizes the work in the task of extension and withdrawal of the tunnel.

Canvas in fabric of polyester of high tenacity, covered with PVC for both faces. Fireproof M-2 of 620 grs. Colour of the canvas to choose

Order No.

113000 Portable player tunnel.Width 2.00 m.High 2.30 m Import from Europe.

113010 Portable player tunnel.Width 2.50 m.High 2.30 m Import from Europe.

113020 Width 3.00 m Height 2.30 m

Dummies

Order No. 113050

Dummy Set 1.5 dummies made of PP board, on PE tubes. Size of each dummy is about 150 x 47 cm. Height adjusts from approx. 165 to 195 cm.

Order No. 113060

Dummy free standing version. Made of UV resistant firm plastic, resistant to heat and cold, bright yellow. Size about 150 x 47 cm.

Order No. 113030

Dummy Set TWO.

5 Dummy's made of UV resistant, firm plastic, resistant to heat and cold, bright yellow. Size about 150 x 47 cm. Trolley for Dummy Set TWO. About 260 cm long made of aluminium. Used with the mobile dummy trolley. The Dummy Set TWO becomes a versatile and mobile penalty wall. The trolley can also be stored in small equipment rooms.

Order No. 113072

SOCCERWALL Practice Dummy SENIOR

single practice dummy, consists of a stable ALU rod with detachable, inherently stable and air-permeable casing, approx. 180 cm high. With insert pin

Order No. 113071

SOCCERWALL Practice Dummy SENIOR.

Trolley made from steel & 5 piece single practice dummy consists of a stable ALU rod with detachable, inherently stable and air-permeable casing, Height approx. 180 cm high

Order No. 113040

Trolley for Dummy Set 1 about 260 cm long, sturdy aluminium construction. Used with the mobile dummy trolley, the Dummy Set becomes a versatile and mobile penalty wall. The trolley can also be stored in small equipment rooms.





The flexible corner flag is made from non-breaking plastic. The diameter of the pole is 50 mm. The pole is equipped with a spring mechanism, which allows the pole to flex.

Linesman's Flag

Order No.

110535: Linesman's Flag. Red colour. Fluorescent nylon, approx. 40 x 40 cm, with lightweight plastic handle.

110730: Linesman's Flag. Yellow colour. Fluorescent nylon, approx. 40 x 40 cm, with lightweight plastic handle.

110746: Linesman's Flag INTERNATIONAL made of fluorescent fabric red/yellow plaid. Approx. 40 x 40 cm with plastic stick and soft grip handle.

110745: Linesman's Flag QUADRO II made of fluorescent nylon, Red/Yellow, approx. 37 x 39 cm, PVC stick with soft-grip handle.



Flag Pole

The free standing corner flag base is made from stainless steel. The base measures a diameter of 250 mm. It weights approximately 3 kg. The base is powder coated. At the centre the base is a full circle. At the corner the base is only three quarters of a circle.

For Sideline

The standard ground socket for corner flag is made from aluminium. The socket is designed to match the corner flag pole. The depth of this socket is 250 mm. The cover for this socket cannot be coated.

Order No.

110610	Corner Poles Yellow Colour
110620	Corner Poles White Colour
110530	Corner Poles Flexible System
110560	Corner Flag Yellow Colour
110540	Corner Flag Red Colour
110550	Corner Flag White Colour
110560	Corner Flag Yellow Colour
110270	Corner Flag Red/White Colour
110580	Corner Flag Blue/White Colour
110590	Corner Flag Yellow/Orange Colour
110600	Corner Flag Orange Colour



Standard Ground Socket For Corner Poles

Order No. 110480

Standard ground socket with lid for corner pole.
Made from aluminium.



Special Ground Socket For Corner Poles

110490: Special ground socket with coat able cover for corner pole. Made from aluminium

110500: Universal pole base made from solid plastic. Weight about 2.7 Kg. Base diameter about Ø 27 cm. This pole base is suitable for the pole diameter: Ø 50 mm.

110505: Universal pole base made from solid plastic. Weight about 2.7 Kg. Base diameter about Ø 27 cm. Included corner pole diameter 50 mm and flag.



Ball Roll Ramp

The ball roll ramp is made from aluminium. It is used to test the characteristics of artificial turf for soccer and hockey. The item is in accordance with the test regulations of FIFA and FIH.

The ramp is used to test the ball rolling. Therefore the ball is positioned at 1 m height on a 45 degree slope with two rails. The bottom end of the rail are bent to a radius of 500 mm. The item is collapsible.

Order No. 118910

Ball Roll Ramp Obligatory on pitches with FIFA homologation. Obligatory on pitches with FIFA homologation.

Order No. 118911

Ball Roll Ramp Obligatory on pitches with FIFA homologation and Hockey Fields. Obligatory on pitches with FIFA homologation.





Manual Soccer Substitute Board

Order No. 116060

The manual soccer substitute board is made from of shock- and weatherproof plastic. The board measures 85 x 40 cm. The number's height is 26 cm. It is suitable to display substitutes (INs and OUTs), extra time, scores, time-outs etc. The display can be adjusted simply and quickly. The adjustment is done by flipping over the coloured plates, which are hinged to the board. It displays numbers from 0-99. There are two yellow numbers for incoming player and two red numbers for the outgoing player.



Electronic Substitution Board Single Face

Order No. 116000

The single sided electrical display board shows incoming and outgoing payer's numbers or additional time. The display can be used indoor or outdoor. The numbers are displayed by high luminosity LEDs. It is equipped with a battery level indicator and automatically shuts down after 15 minutes. The numbers are displayed on one side of the display board.

Electronic Substitution Board Double Face

Order No. 116010

The double sided electrical display board shows incoming and outgoing payer's numbers or additional time. The display can be used indoor or outdoor. The numbers are displayed by high luminosity LEDs. It is equipped with a battery level indicator and automatically shuts down after 15 minutes. The numbers are displayed on both sides of the display board.



Spray Line Marker FM 500

Order No. 110770

Spray line marking cart with automatically pressure generating. The needed spray pressure will be generated by pushing the cart with a newly developed impeller-pump (rear wheel-drive). The pump is made from aluminium and it's Hc-coated. The shaft is equipped with closed ball bearings and shaft seal ring.

So the pump stands a loading capacity. For this reason can be used all variants of marking-paints known on the market.

The spraying unit is positioned in front of your view, flexibly for adjust in height and lateral and to operate easy by a hand lever at the guiding shaft. The line width is adjustable from 50 up to 150 mm. The cart has 2 plastic paint containers with 13 and 19 Litres, which you can both fill in with marking-paint or you fill only 1 container with paint and the second container with water for the later cleaning of the integrated spraying system and the pump.

Each paint-container has its own stop-cock and can easily pick up for empty the container or for cleaning.

The cart has a strong steel construction with weather-proof powder-coated finishing. All parts are zinc plated. The big ballon-wheels 260 x 85 mm with roller bearing ensures an easy working and an exact lining. The guiding shaft is for variable height adjustable.

Further technical data:

dimensions: ca. 760 x 550 x 790 mm

own weight: ca. 22 kg packed in carton

The basic equipment includes 1 filling funnel 200mm Ø with sieve.

Line Marking Trolley Roll-Liner

Order No. 110760

The line marking trolley ROLL-LINER is made from aluminium. The trolley is powder coated and measures 95 x 63 x 90 cm. The trolley is equipped with two pneumatic wheels. The trolley marks the line via its rollers in the front section of the trolley. The rollers are available in 50, 100 and 120 mm width. The handle for the trolley is height adjustable. The weight of the trolley is 21 kg. Its filling capacity is 15 litres. The balance of the marking fluid can be removed easily by the use of water.



Ball Heading Post Two Side

Order No.110810

The ball heading Post two sides is made from special aluminium profiles. The profile measures a cross section of 120x100x2.5 mm. The post is equipped with two balls, which are fixed on a rope. The item is used to improve the ball heading skills.

Order No.110860

The standard ground socket is made from aluminium. It is installed in the ground to slot in the soccer goal post. The ground socket matches the soccer goal profile exactly. The socket measures a length of 800 mm.

Order No.110870

The standard ground socket is made from aluminium. It is equipped with a special cover, which can be coated on site. It is installed in the ground to slot in the soccer goal post. The ground socket matches the soccer goal profile exactly. The socket measures a length of 800 mm.



Ball for Ball Heading

Order No. 110870

Ball for ball heading, Size 5 ball with 32 panels incl. Loop & swivel



AFN SOCCER Ball Size 5

Order No. 119700

AFN Soccer Ball Size 5. Our AFN soccer ball is hand cross-stitched and features a premium high-gloss PU cover, and AFN's top-of-the-line high density latex bladder to provide a consistent, quality touch with every contact. Designed for maximum durability. It's the soccer ball of choice for numerous state associations, high schools, premier & youth soccer organizations and junior clubs.




AFN Futsal Ball Size 4

Order No. 119701

AFN Futsal Ball Size 4. Our AFN futsal ball is hand cross-stitched and features a premium high-gloss PU cover, and AFN's top-of-the-line high density latex bladder to provide a consistent, quality touch with every contact.



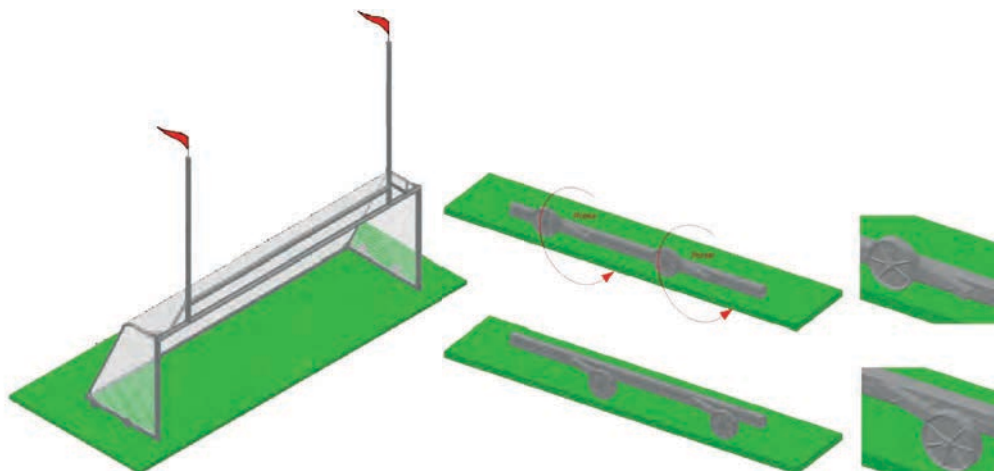



Practice Soccer Goal with Rugby

The practice soccer goal with rugby is made from special aluminium profiles. The inside dimension of this goal are 7.32x2.44 m. The front frame of the goal is made from oval 120x100x2.5 mm profile. The bottom frame is made from a rectangular hollow 80x60x3 mm. The top projection of the goal is 0.8 m. The lower projection measures 2.0 m. It is equipped with the INTERLOCK net hook system, which ensures that the nets hangs perfectly. The total height of the rugby goal post is 6.50 m. The goal is equipped with transport wheels.

110010: White powder coated

110020: Aluminium surface

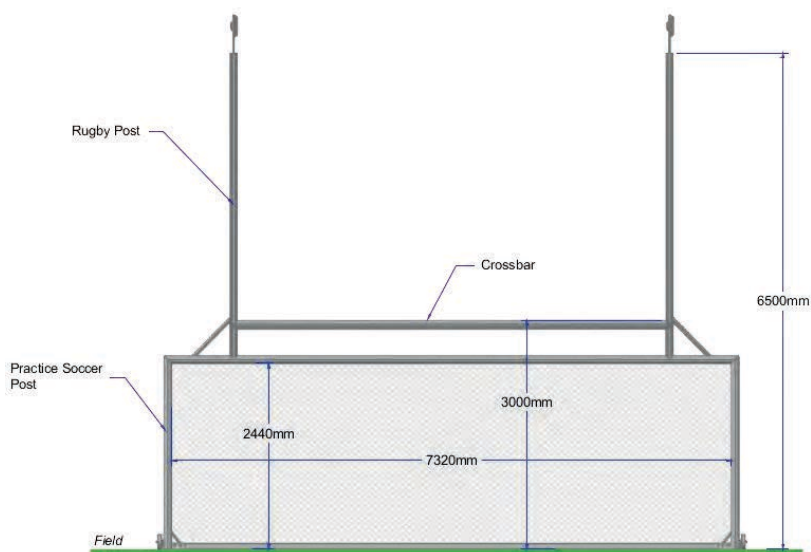

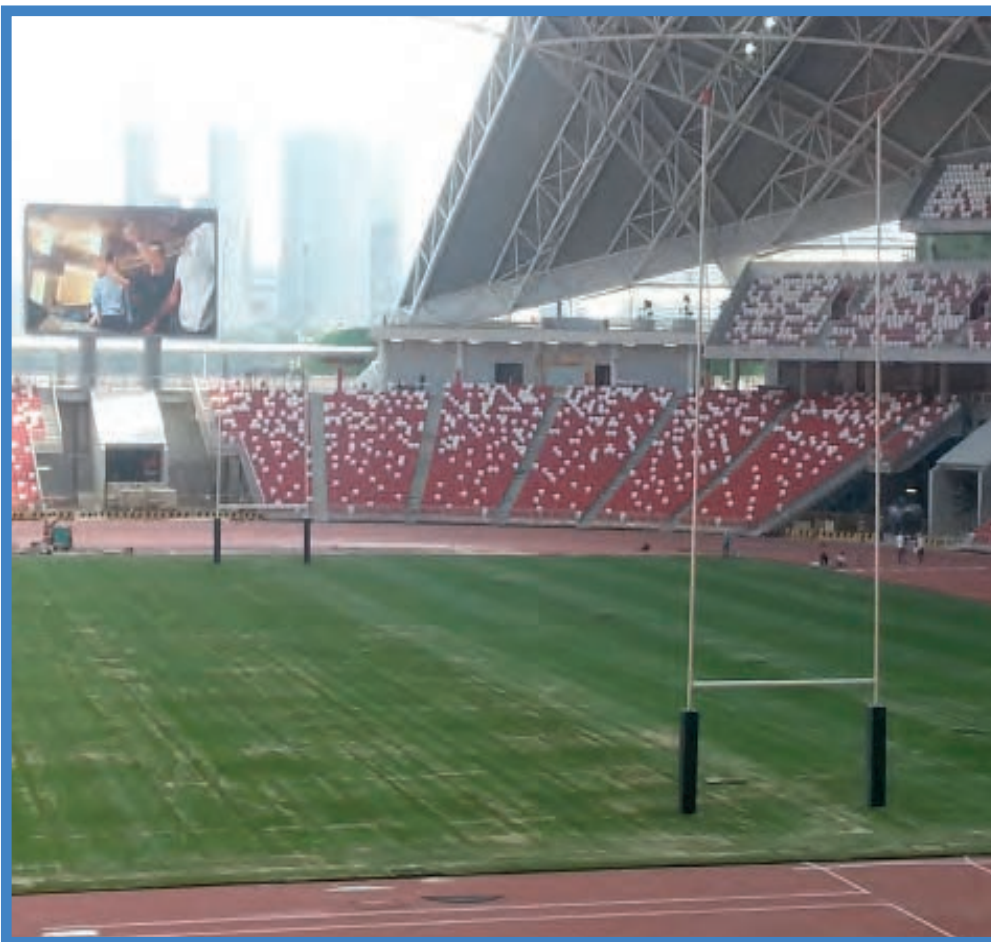

Rugby Goal Post

The rugby goal post is made from special aluminium profiles. The cross section of the post measures 120x100 mm. The goal consists of two vertical posts and a cross bar. The cross bar can be fixed to the vertical posts with two screws. The final height of the cross bar also can be adjusted on site. The top edge of the cross bar needs to be 3 m above the ground level. The distance between the vertical posts is 5.6 m. The goal is available in aluminium finish or powder coated. The vertical posts are available in various lengths.



Rugby Goal Post

Order No.	Height	Color
112050	6.05 M	Aluminium Surface
112051	6.05 M	White Powder Coated
112000	9 M	Aluminium Surface
112001	9 M	White Powder Coated
112040	10 M	Aluminium Surface
112041	10 M	White Powder Coated
112030	11 M	Aluminium Surface
112031	11 M	White Powder Coated
112010	12 M	Aluminium Surface
112011	12 M	White Powder Coated



Padding For Rugby Goal Post

Order No. 112080

The rugby padding is made from a foam core and a PVC cover. The padding measures a height of 2.0 m and a thickness of 150 mm. The PVC is weather resistant.



112060



112065



112070



112075

Ground Socket For Rugby

Order No. 112070

The standard ground socket is made from aluminium. It is installed in the ground to slot in the rugby goal post. The ground socket matches the rugby profile exactly.

Order No. 112065

Our hinged aluminium ground socket is fitted with a to and fro swivel element which allows the rugby goal post uprights to be set up quickly and easily. With lid chamber and attached lid which can be covered on site to suit the various surfaces.

Order No. 112060

The special ground socket for rugby is made from a special aluminium profile. It is equipped with a special cover, which can be coated on site. It is installed in the ground to slot in the rugby goal post. The ground socket matches the rugby goal profile exactly.

Order No. 112075

The hinge for rugby goal post is made from special extra strong aluminium profiles. The structure is reinforced with stainless steel bars. All screws are made from stainless steel as well. The structure allows a more comfortable erecting of the goal post. The hinge can be slotted in the ground socket easily. The post is slotted in the socket on top of the hinge. This leads to an increased stability during the installation of the goal.

One set consists of two pieces to equip one rugby goal. On request this item can be powder coated.



Rugby Protector Barrier

Order No. 112084

PVC covered padding with foam core. 2 meters long
0.9 m high 0.5m bottom width 9cm top width



KickingTee

Order No. 112081

The precision tee (Black) is constructed from moulded rubber. It is ideal for all ages and all levels of ability. A very popular tee among Professional players



Flag On Rugby Post

Order No. 112078

Flag on rugby post (1 set = 2 piece)



Padding For Corner Flag

Order No. 112083

Padding for rugby corner flag

‘Flap Down Net System’





The ‘flap down’ net suspension system is a fully integrated and closed system. This means, all suspension parts are placed inside the goal post profile. The slot for the net suspension is covered to allow a smooth and safe appearance of the goal post.

Therefore, there are no sharp edges or corners at the goal post, which can cause harm to players. The suspension is realized by an aluminium profile, which holds the nets in place. The profile is designed to leave space for the net to be fixed perfectly. The whole system is covered with a flap. The flap is mounted, so it can open and close like a door. The flap can be locked to secure the net in the position. The design is registered of patent in Malaysia and Germany.



Integrated Net Hook System

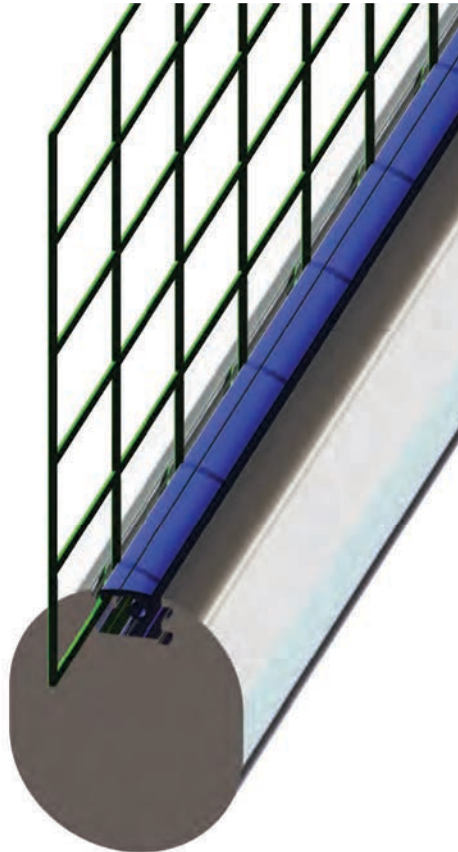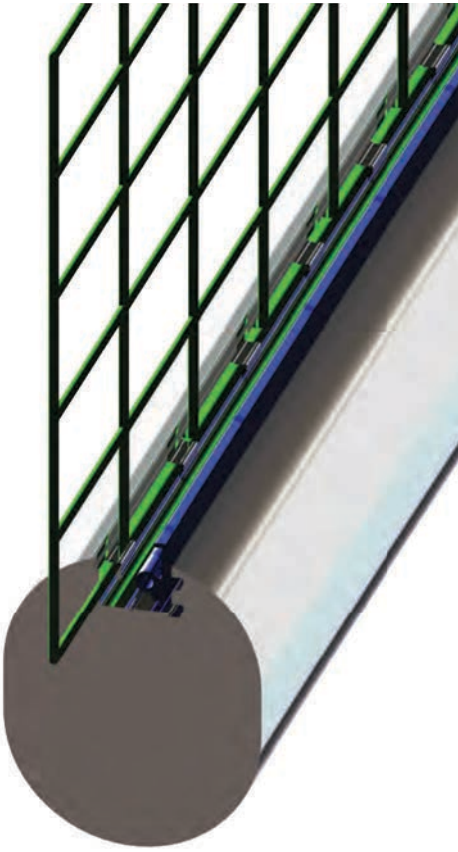

Order No. 110055
upgrade to FLAP DOWN NET HOOK System for Goal Post 7.32 x 2.44 m SET

Order No. 110056
upgrade to FLAP DOWN NET HOOK System for Goal Post 5.00 x 2.00 m SET

Order No. 110057
upgrade to FLAP DOWN NET HOOK System for Goal Post 3.00 x 2.00 m SET