





Advanced Maintenance Equipment



SportChamp - SC2D/SC2D4HL

Multifunctional ride-on machine for the maintenance of artificial turf.

Technical information:

Drive:	SC2D / SC2D 4HL: 3-cylinder diesel engine, water-cooled/ 18,4
kW (22 HP)	
Traction drive:	hydrostatic, driving Speed up to 10 km/h, hydraulic lifting device for accessory attachments and filter box; differential lock
Capacity of tank:	approx. 30 Litre
Brush working width:	according to the brush: 900 - 1.600 mm
Weight:	starting at approx. 680 kg
Dimensions:	L 2.800 x B 1.320 x H 1.283 mm

Details



Clearly arranged display - easy to operate



SC2D4HL: hydraulic high-level emptying up to 2.000 mm



SC2D: hydraulic lifting for tipping the filter box



The vibrating screen separates dirt from the infill and spreads the infill on the artificial turf again at the same time



Tires especially for use on grassy surfaces ensure low pressure on the ground



Practical coupling system for mounting all attachments without tools



SportChamp - SC2BL

Multifunctional ride-on machine for the maintenance of artificial turf.

Technical information:

Drive:	SC2BL: 2-cylinder petrol engine, air-cooled, 22 PS
Traction drive:	hydrostatic, driving Speed up to 10 km/h, hydraulic lifting device for accessory attachments and filter box; Differential lock approx. 30 litre
Capacity of tank:	approx. 30 litre
Brush working width:	according to brush: 900 - 1.600 mm
Weight:	starting at approx. 680 kg
Dimensions:	L 2.800 x B 1.320 x H 1.283 mm



Removable attachments



Rotating brush 1.000 mm Art.-No. 6400029



Rotating brush 1.500 mm Art.-No. 6400017



Rotating brush 1.100 mm Art.-No. 6211213



Opposed brush Art.-No. 6400177



Decompacting brush Art.-No. 6400132



Rigid brush - Front-mount attachment Art.-No. 6400093



Sweeping brush Art.-No. 6400027



Decompacting / Levelling device - Rear-mount attachment Art.-No. 6400080



Spreading device 800 mm Art.-No. 6400133



TurfBoy - TB1

TurfBoy TB1 is driven by a 2-cylinder 16 HP air-cooled petrol engine. The ground-driven rotary brush eliminates suspended particles, abrasion and dirt particles from the top surfaces. Its working width is 700 mm.

Technical information:

Drive:	2-cylinder petrol engine, air-cooled / 12 kW	(16 HP)
Traction drive:	hydrostatic, driving Speed up to 12 km/h	
Working width:	700 mm	
Weight:	380 kg	
Dimensions:	L 1.800 x B 900 x H 1.200 mm	

Details



Expanded drag brush, working width 1.600 mm



Ground driven rotary brush with adjustable vibrating screen from 4-10 mm



TurfBoy TB1 with drag brush DB1600



TurfBoy - TB2

TurfBoy TB2 is driven by a 16 HP air-cooled petrol engine. Due to its very compact design the machine is ideal for the work on sand infilled tennis courts or sand/rubber infilled pitches such as futsal courts. The working depth of the rotary brush can be adjusted via two spindles. The vibrating screen can be precisely adjusted, with variable settings from 4 to 10 mm, depending and in accordance with the condition of the infill material. You can easily clean the filter by turning the handwheel.

Technical information:

Drive:	2-cylinder petrol engine, air-cooled / 12 kW (16 HP)
Traction drive:	hydrostatic, driving speed up to 12 km/h
Working width:	900 mm
Weight:	380 kg
Dimensions:	L 1.800 x B 900 x H 1.200 mm

Details



Adjustable sieve from 4 - 10 mm



Hand wheel for dedusting of the permanent filter



Unilateral overlapped drag brush row



TurfKing - TK1502

TurfKing TK1502 brush and vacuum system guarantees clean sports surfaces and optimum playing conditions. Conventional brush rows and/or drag mats are not suitable for thorough cleaning of floor coverings/deep cleaning and loosening of sand-filled and/or rubber-filled artificial turf. The 3-point rear-mount type accessory for compact tractors goes with any type of tractors with a power of at least 20 to 25 HP and combines all important basic functions in one machine. The device compact and easy to connect.

Technical information:

Working width:	TK1100 = 1.100 mm TK1500/TK1502 = 1.500 mm
Drive:	PTO adaptor 540 rpm
Weight:	TK1100 = 225 kg TK1500 = 300 kg TK1502 = 270 kg
Dimensions:	TK1100: L 900 x B 1.195 x H 830 mm TK1500: L 1.195 x B 1.655 x H 765 mm TK1502: L 900 x B 1.670 x H 830 mm

Details



Permanent filter with continuous de-dusting of filtered suspended particles



Drag brush with guide pulley



Steel springs for gently loosening of the infilling material



TurfCare - TCA1400

TurfCare TCA1400 maintains any kind of infilled synthetic turf pitches. The wheel drive makes the equipment independent from any hydraulic or power shaft drives. Therefore the TurfCare can be pulled by various vehicles such as small compact tractors or quads.

The working depth can be precisely set and locked via two adjusting spindles.


Technical information:

Working width:	1.400 mm
Weight:	170 kg
Dimensions:	L 1.300 x B 1.800 x H 510 mm

Details



Vibrating screen adjustable from 4 - 10 mm



Tines for gently loosening of the infilling material



Fold-out transport rollers for transverse drive



TurfSoft - TS2



TurfSoft TS2 is a solution as simple as effective for the joy in the game and maintaining the value of small areas with infilled surfaces (sand and sand/rubber). Using this machine you can eliminate suspended particles, abrasion and dirt particles from the top surfaces. The manoeuvrable TurfSoft is ideal for areas with little space to move, where stairs, steps and narrow doorways complicate the access to the artificial turf pitches.

Technical information:

Drive:	1-cylinder petrol engine / 3.2 kW (4 HP)
Filter box :	permanent filter approx. 5 m ²
Working width:	800 mm
Weight:	approx. 85 kg
Dimensions:	L 980 x B 750 x H 570 mm


Details



Foldable steering arm for easy transport and storing in a small place



Extractable filter sieve different sieve sizes available

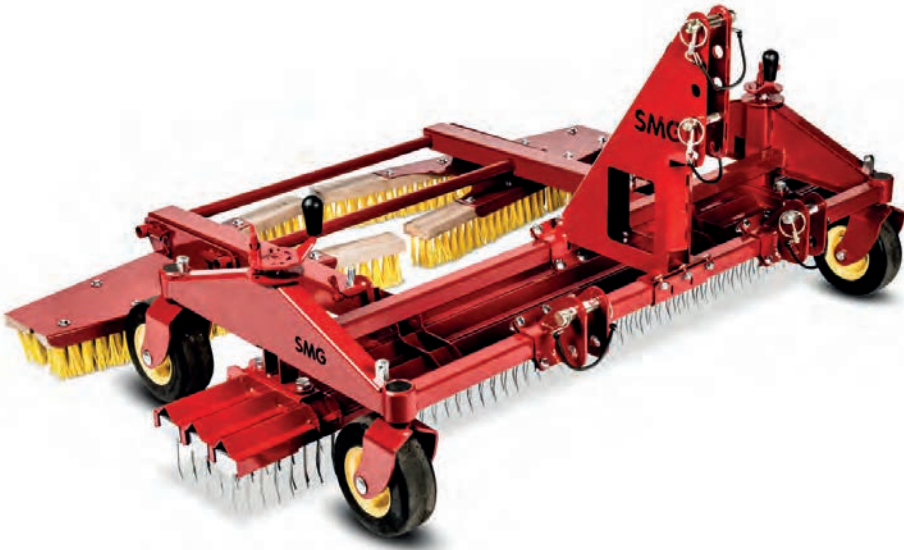

TurfTuner - TT1600

3-point rear-mount type accessory with variable hitches fits all commercially available utility tractors. It is used for loosening of infilled artificial turf and to straighten the fibres. The infill material is equalized with the trailing drag brush.

The working width is 1.600 mm, the working depth can be precisely regulated by two adjustment spindles. The tines can be replaced on request / if necessary by rows of brushes.

Technical information:

Working width:	ca. 1.600 mm
Weight:	135 kg
Dimensions:	L 1.750 x B 1.400 x H 800 mm

Details



Rows of tines



Adjustment spindle lock mechanism for working depth



Trailing drag brush, can be folded



CareMax - CM2D

CareMax CM2D is driven by a 17 HP water-cooled diesel engine and can be equipped with several proven attachments for the cleaning and maintenance of artificial turf pitches.

Technical information:

Drive:	3-cylinder diesel engine, water-cooled / 12.5 kW (17 HP)
Traction drive:	hydrostatic, driving speed up to 15 km/h
Weight:	530 kg
Dimensions:	L 2.000 x B 1.300 x H 1.200 mm

Details



3-point rear attachment system



Controls for attachments at the front and rear



Tools and Devices / TurfGrip - TurfGrip TG30, TG60

Gripping tongs for a fast and easy installation of artificial turf
TG 30 Art.-No. 8900048
TG 60 Art.-No. 8900049



Tools and Devices / TurfFix - TurfFix

TurfClutch for fixing the joints of artificial turf strips while glueing
Art.-No. 8900054



Tools and Devices / LineCutter - LineCutter

Tool for cutting of variable width of straight lines and circular lines in artificial turf
Art.-No. 6400081

Tools and Devices / CircleCutter CircleCutter CC1

Tool for circular cutting in artificial turf
Art.-No. 6400095



Tools and Devices / CircleCutter CircleCutter CC2

Tool for circular cutting in artificial turf
Art.-No. 6400208





Tools and Devices / GlueFix
GlueFix GF300

Glue applicator for glue coating of seam tape for artificial turf.
Stationary version
Art.-No. 6400098

Tools and Devices / GlueFix
GlueFix GF150

Glue applicator for glue coating of seam tape for artificial turf.
Mobile version
Art.-No. 6400153



Tools and Devices / SeamFix
SeamFix

Pressure tool for the solidified connection of the seams of artificial turf and glue coated seam tape
Art.-No. 8900056

Tools and Devices / TurfRoller
TR5000

Cart with hydraulic lifter for the transport and rolling out of artificial turf





Tools and Devices / GrassCutter
GrassCutter

For proper cutting alongside of existing track seams of artificial turf
Art.-No. 6400196



Tools and Devices / EdgeTrimmer
EdgeTrimmer

Art.-No. 8900059



Tools and Devices / TurfSet
Tool set

Tool set for the installation of artificial turf

SeamFix -